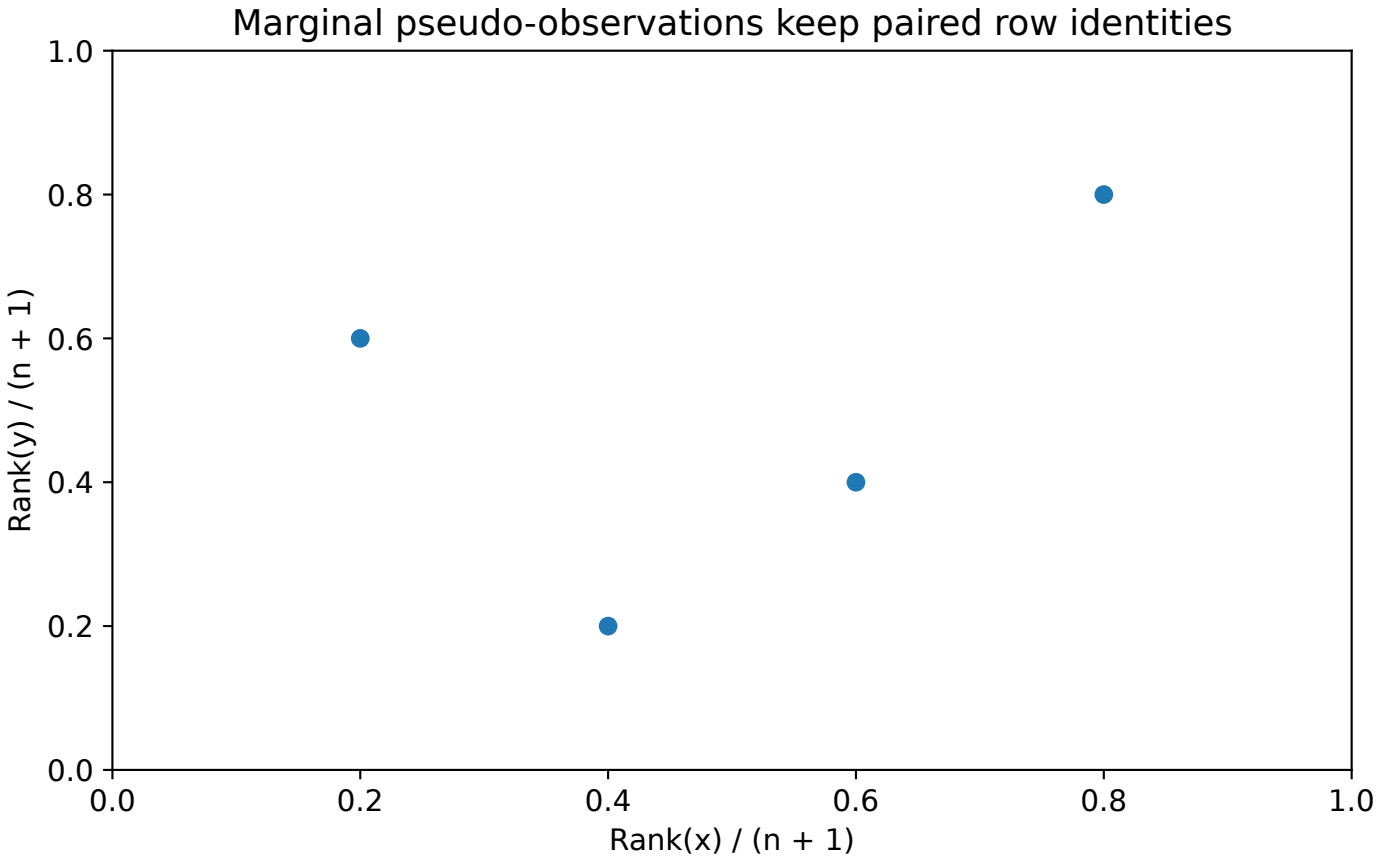
Marginal pseudo-observations keep paired row identities
Rank(y) / (n + 1)
Rank(x) / (n + 1)
0.0
0.2
0.4
0.6
0.8
1.0